


DIMMER CASAMBI 2 CH

Through this device it is possible to adjust the luminous brightness thanks to a command available on “CASAMBI APP”.

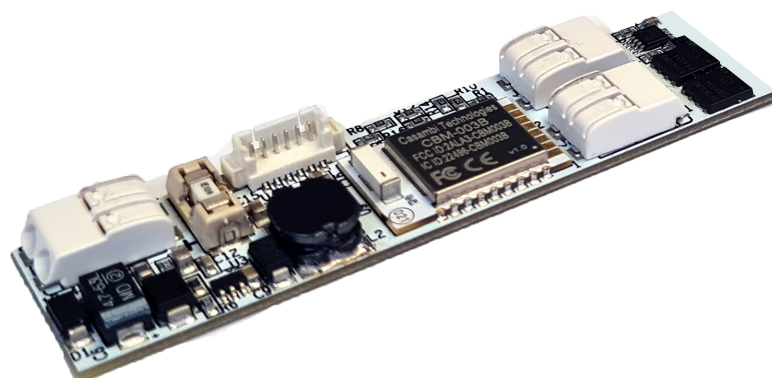

Download on the
App Store

ANDROID APP ON
Google play


Download the free
Casambi APP on APP
STORE and GOOGLE PLAY

RoHS **CE**


Technical Specification

	Constant Voltage	
Channels	2	
Supply voltage	DC min 12 Vdc .. max 48 Vdc	
Input current	max 9 A	
Output voltage	= Vin	
Output current	max 9 A/ch	max 9 A total
Nominal Power Maximum value, depends on the ventilation conditions.	@12V 108 W max	@48V 432 W max
D-PWM dimming frequency	1000 Hz	
D-PWM resolution	1000 step	
Operating frequencies	2,400...2,483 GHz	
Maximum output power	4dBm (60 m open air)	
Storage temperature	min: -40°C max: +60°C	
Ambient temperature	min: -10°C max: +40°C	
Protection grade	IP20 (indoor use only)	
Wiring	0,2 - 0,75 mm ² (24 to 18 AWG)	
Dimension	19x78x6 mm	
Fixing	Biadhesive	


Dimension - Full scale 1:1

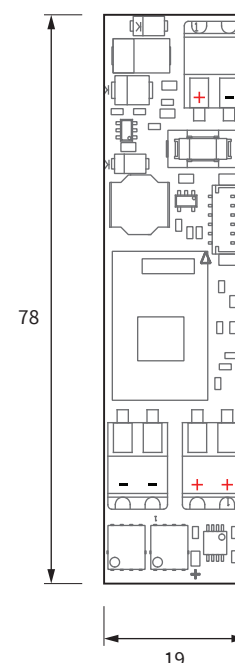

Bertronic

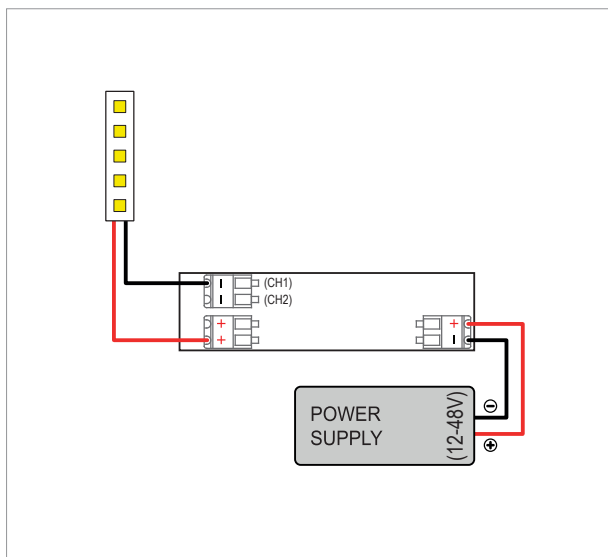

Installation: Single Channel




Output current


9 A max

Nominal Power

@12V	@24V	@36V	@48V
108W max	216W max	324W max	432W max

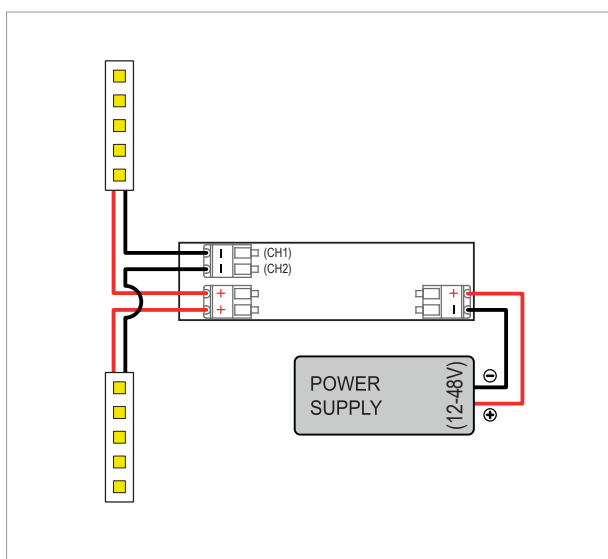

Installation: Double Channel

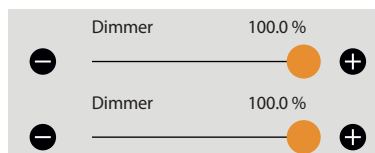


Output current


9 A max | 4,5 A/ch

Nominal Power

@12V	@24V	@36V	@48V
108W max	216W max	324W max	432W max

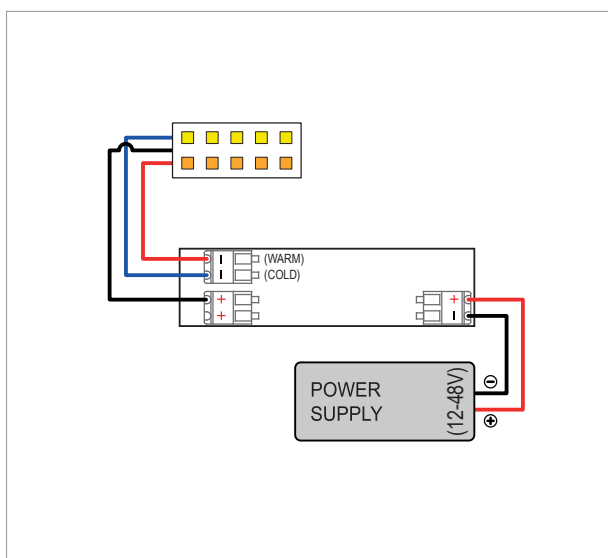

Installation: Tunable White 3 wires

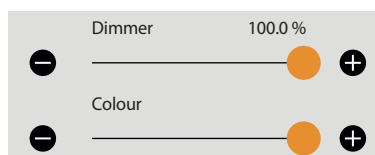


Output current


9 A max | 4,5 A/ch

Nominal Power

@12V	@24V	@36V	@48V
108W max	216W max	324W max	432W max

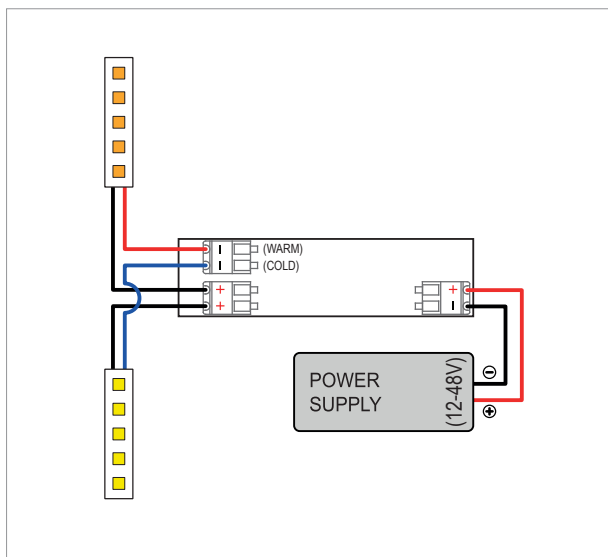

Installation: Tunable White 4 wires

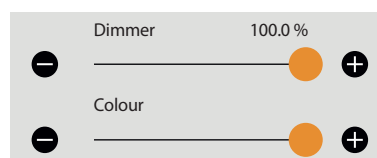

Output current

9 A max | 4,5 A/ch

Nominal Power

@12V	@24V	@36V	@48V
108W max	216W max	324W max	432W max